

# CLUB-E 1024

Next generation Ethernet and USB to DMX interface



**FREE SOFTWARE & APPLICATION DOWNLOAD**

Newly designed aluminium housing with beautiful brushed anodized finish and updated electronics that can be connected on Ethernet LAN and easily work as Art-Net/sACN to DMX decoder/converter/node.


Ideal for advanced users, experienced lighting professionals and demanding projects, CLUB-E excels at live show control, audio and video timeline synchronization, and precise sound to light automation, using the latest suite of Chromateq software that transforms any computer into a powerful lighting control console.



Ethernet    USB-C    Infrared    Next Scene Mode Selection

#### LED INDICATOR CODES:

- G on + Y off = No signals
- G fast blink + Y off = USB signal
- G on + Y fast blink = Ethernet signal
- G slow blink + Y off = Stand Alone DMX
- G on + Y slow blink x1 = Node (ArtNet)
- G on + Y slow blink x2 = Node (sACN)

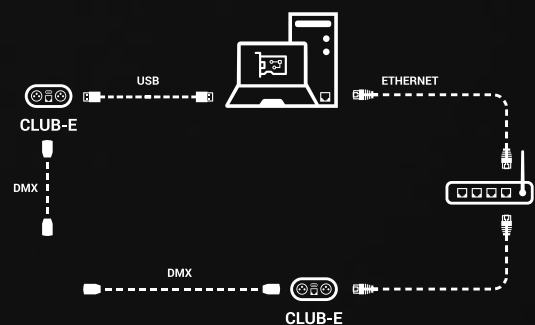

**CHROMATEQ**

## HARDWARE Features

DMX Output	1024 (2x512) per interface, Live PC and Stand Alone
Input	USB-C, ETHERNET
ETHERNET (10 Mb/s)	Yes (LAN, compatible with Wifi router)
Max interface connected	12 by USB / 128 by Ethernet
RDM (Remote Device Management)	Yes, with Pro DMX 2 software only
NODE, Art-Net & sACN to DMX decoder	Yes, 2x512 Out per interface
DMX Modes	DMX In/Out, DMX Splitter, DMX Record, DMX Trigger
Wi-Light 2 APP command and configuration	Yes (LAN Remote triggers, requires a WIFI router)
Zone (Stand Alone)	1, play 1 scene/sequence per time
Memory Step capacity	100 ~ 1024 (300 Kb)
Infrared (scenes, play, pause, dimmer, speed)	Yes (Remote Unit is Optional)
Button	NEXT scene or NODE mode selection (hold 5s)
UDP / Ethernet triggers and commands (SDK)	Yes, (requires a WIFI router)
I/O Connectors	USB-C, 3 pin XLR (XLR5 optional)
Power	5V. DC, 0.2A input by USB-C
Dimensions (mm / in)	H: 90 (3.54), W: 80 (3.15), D: 45 (1.77)
Weight / Operating Temperature / Certification	0.19 Kg (0.42 lb) / -40 to +85 C° / CE, RoHS
Housing	Diecast (or Extruded) Aluminum with brushed anodized finish
International Warranty	5 years



## SOFTWARE Features

PRO DMX 2	Yes
PIXXEM	Up to 255 x 512 ART-NET Output
LED PLAYER / PRO DMX	Up to 64 x 512 ART-NET Output
STUDIO DMX	3D viewer in real time (Full mode)
WI-LIGHT 2 - APP	Software and device control from LAN
ART-NET / sACN Output (LED PLAYER, PRO DMX)	2x512 per connected interface
ART-NET /sACN Output (PIXXEM)	8x512 per connected interface
DVI supported resolution (PIXXEM)	128x128 or 16394 Pixels
Audio, Video and Lighting timeline	Yes, 30 minutes synchronization
MIDI, RS232, DMX IN, Keyboard, Hyperlinks	Yes
MIDI control, Audio BEAT, BPM, Wi-Light 2, UDP	Yes
User Interface customization	Yes
Worldwide Technical Support	Yes, English, French, Spanish, Portugese, Chinese

### Mobile minimum configuration:

Android 5 / iOS 10 and +  
1Ghz CPU, 1 Gb RAM, 60 Mb disk

### Configuration minimale PC:

Windows, Mac OS, Linux (32 and 64 bits)  
2Ghz CPU (2 cores), 8 Gb RAM  
2Gb RAM graphic card (for 3D only)  
600 Mb disk, 1920x1080 resolution  
1 USB port (Device)  
1 Ethernet Port (for Art-Net & sACN)

### Software & App download:

Software package download: <https://chromateq.com/dmx-software-downloads/>

191 Allée de Lauzard  
34980 St Gély du Fesc, FRANCE  
Web: [www.chromateq.com](http://www.chromateq.com)  
Email: [info@chromateq.com](mailto:info@chromateq.com)  
Phone: +33 952210755  
Wechat: Chromateq  
WhatsApp: +8613422062209  
QQ: 2908265661



[www.chromateq.com](http://www.chromateq.com) - Support • Download