



MIPRO®

Digital Wireless Receiver Module User Guide

MRM-58 5.8 GHz

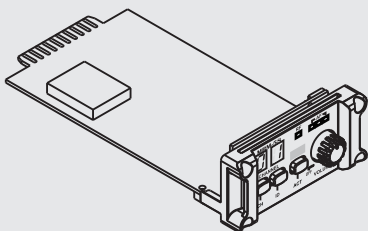


MRM-24 2.4 GHz

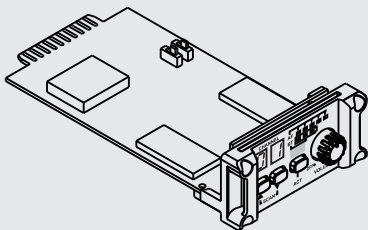

I. Parts Name. Fig. 1

MRM-58

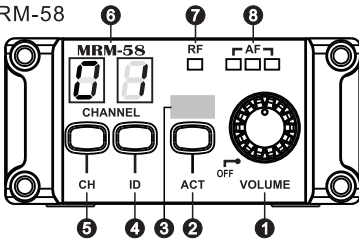

MRM-24

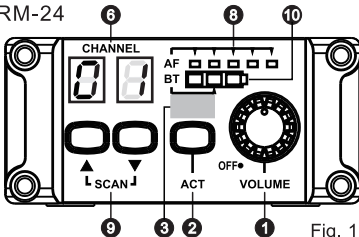


Fig. 1

- ① Receiver Power / Volume Control
- ② Channel sync ACT button
- ③ Channel sync ACT window
- ④ ID button
- ⑤ Channel button
- ⑥ Channel display LED screen
- ⑦ RF signal indicator
- ⑧ Audio signal indicators
- ⑨ Channel SCAN buttons
- ⑩ Transmitter battery status indicators

1

II. Changing Receiver Channel

1. Scan Automatically for a Non-interference Receiver Channel:

- (A) MRM-58: Press and hold CH button ⑤ for two seconds, existing channel blinks. During blinking, press and hold for two seconds and it starts to scan automatically for a clear channel. Press again, the channel stops blinking and the new channel is saved. Fig. 2

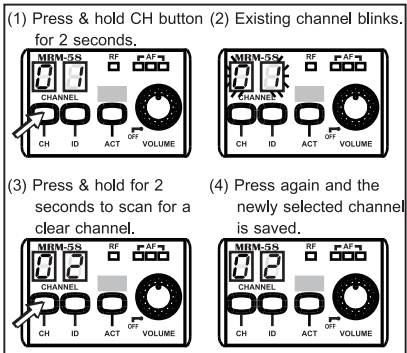


Fig. 2

- (B) MRM-24: Press and hold up or down SCAN button ⑨ to perform a channel scan. Existing channel ⑥ blinks to denote it is ready to accept parameter changes. During blinking, press and release SCAN button to scan and stop for an open channel. This new channel is now saved. If SCAN button is not pressed within six blinks, it stops blinking and reverts back to the existing channel. Fig. 3

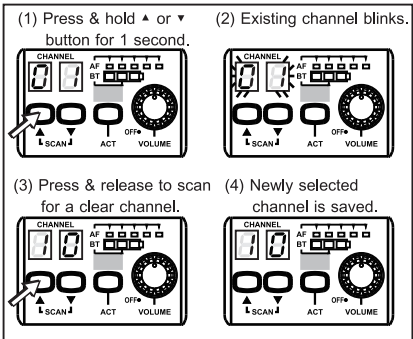


Fig. 3

2. Manually Search for a Receiver Channel:

- (A) MRM-58: Press and hold CH button ⑤ for two seconds, existing channel blinks. During blinking, press and release, the number starts to go forward to the next channel in order (01, 02, 03, ...11, 12, 01,02) every two seconds. Press again, the channel stops blinking and the new channel is saved. Fig. 4

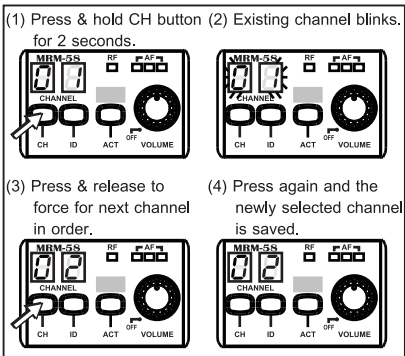


Fig. 4

- (B) MRM-24: Press and hold up or down SCAN button ⑨ to perform a manual channel search. Existing channel ⑥ blinks to denote it is ready to accept parameter changes. During blinking, press and hold Channel button to force the channel to go forward to the next channel in order. Release Channel button until a desired channel is located. This new channel is now saved. If Channel button is not pressed within six blinks, it stops blinking and reverts back to the existing channel. Fig. 5

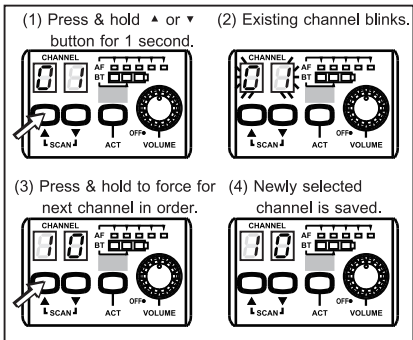


Fig. 5

III. To Set Up ID Code

1. MRM-58:

- (A) 8 ID codes (d1-d8) can be selected. Select dP to enter “pairing mode” for 1-to-1 receiver to transmitter transmission. When paired and synchronized successfully via ACT button with transmitter, the receiver blocks signals from other MIPRO 5.8 GHz transmitter, and other receivers cannot receive the signal of the paired transmitter.
- (B) Press and release ID button **4** , the LED screen shows existing ID code: d1, d2, ...d8, dP, after 2 or 3 seconds, it will return to existing channel display.
- (C) Press and hold ID button, existing channel blinks. During blinking, press and release, the number starts to go forward to the next ID code in order (d1, d2, ...d8, dP) every two seconds. Press again, the number stops blinking and the new ID code is saved, Fig. 6.

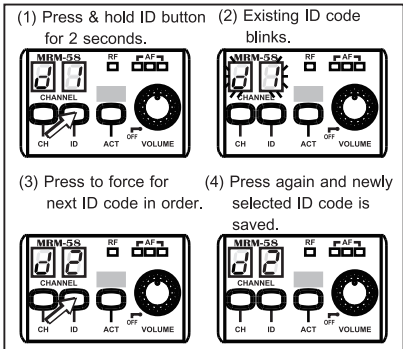


Fig. 6

2. MRM-24:

- (A) DIP switch numbers 1 and 2 are reserved for setting up to 4 ID codes:
 00 ==> 1, 01 ==> 2, 10 ==> 3,
 11 ==> 4. Fig. 7

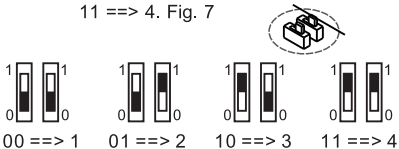


Fig. 7

- (B) The identification code can be programmed to provide protections against same channel interference in the same venue when multiple receiver channels are used.
- (C) CAUTION: Once ID code is programmed, one must perform an ACT channel synchronization so the new ID code becomes effective.

IV. ACT Channel Synchronization.

Fig. 8

1. When new channel or ID code is set up, apply ACT function to synchronize the transmitter.
2. Press ACT button ② on the receiver. Existing channel blinks.
3. Power on the transmitter and align the ACT sync windows ③ of both transmitter and receiver within 25 cm between each other for an automatic channel synchronization.
4. If ACT channel synchronization is performed successfully, the new channel in Channel Display Screen stops blinking and RF signal indicator ⑦ of the MRM-58 or transmitter battery status indicators ⑩ of the MRM-24 will glow.
5. To deactivate ACT channel synchronization, just press and release ACT button again.

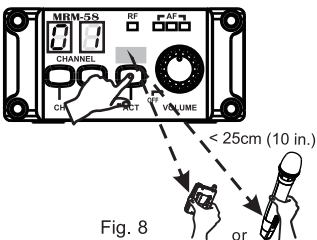


Fig. 8

V. Golden Finger Wiring. Fig. 9

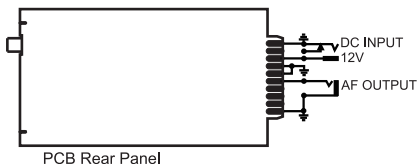


Fig. 9

VI. Notes

1. Refer to actual product in the event of product description discrepancy.
2. Frequency range and maximum deviation comply with the regulations of different countries.

Disposal



2005-08-13

Dispose of any unusable devices or batteries responsibly and in accordance with any applicable regulations.

Disposing of used batteries with domestic waste is to be avoided!

Batteries / NiCad cells often contain heavy metals such as cadmium(Cd), mercury(Hg) and lead(Pb) that makes them unsuitable for disposal with domestic waste. You may return spent batteries/accumulators free of charge to recycling centres or anywhere else batteries/ accumulators are sold.

By doing so, you contribute to the conservation of our environment!

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The antennas used for this transmitter must be installed to provide a separation distance of at least 0.5 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

Digital Wireless Receiver Module

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

IC

This device complies with Industry Canada RSS-210 ISSUE 2 standards. Operation is subject to the following two conditions:

(1) this device may not cause interference, and
(2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- ! Reorient or relocate the receiving antenna.
- ! Increase the separation between the equipment and receiver.
- ! Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ! Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 0.5 cm between the radiator and your body.

MIPRO[®]
MICROPHONE PROFESSIONALS

MIPRO Electronics Co., Ltd

Headquarters: No. 814, Beigang Rd., Chiayi City 600079, Taiwan
Tel : +886.5.238.0809 Fax : +886.5.238.0803
www.mipro.com.tw mipro@mipro.com.tw



CE FC



2CE636C

All rights reserved. YM 021/01

Do not copy or forward without prior approvals MIPRO.

Specifications and design subject to change without notice.