


8FCX51







8Ω**Coaxials - 8.0 Inches**

- 500 W continuous program power capacity
- 100° nominal coverage
- 70 - 18000 Hz response
- 96 dB sensitivity
- 20.1 mm (0.79") HF unit exit diameter

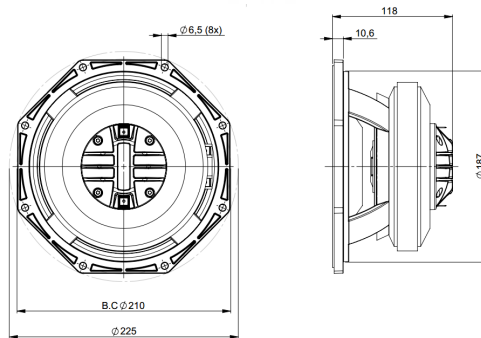

8FCX51

Coaxials- 8.0 Inches

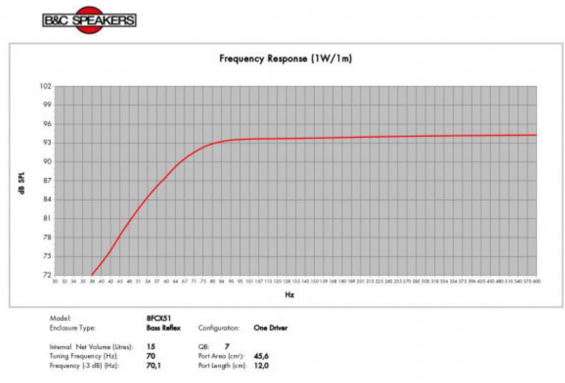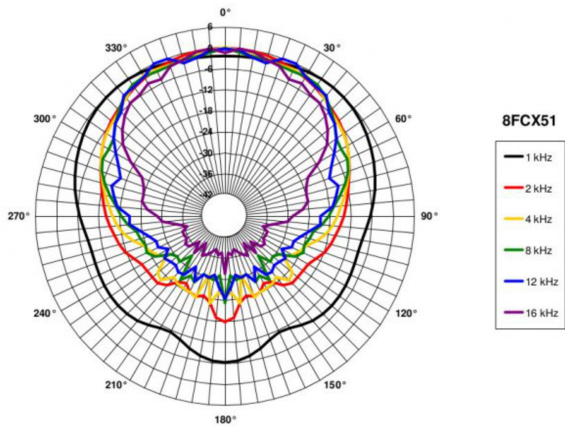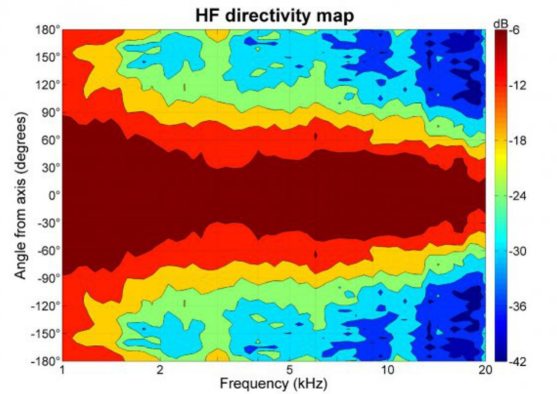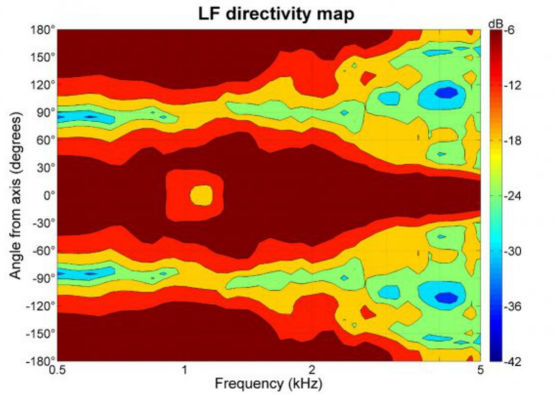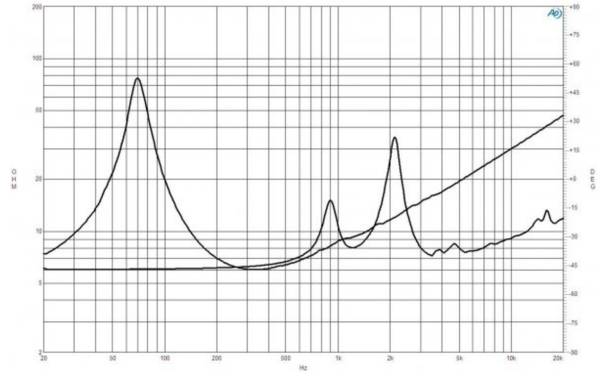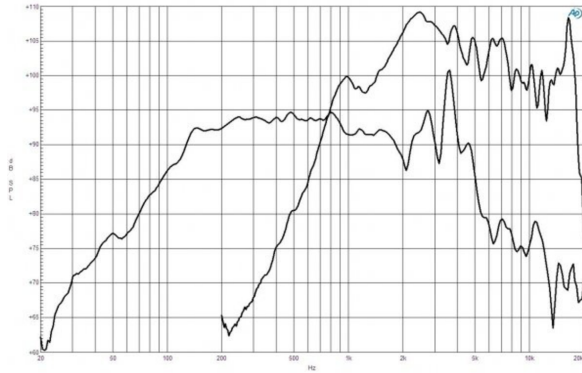

SPECIFICATIONS

Nominal Diameter	210 mm (8.0 in)
Nominal Impedance	8 Ω
Minimum Impedance LF	6.0 Ω
Minimum Impedance HF	7.0 Ω
Frequency Range	70 - 18000 Hz
Dispersion Angle ¹	100 °
Woofers Cone Treatment	WP Waterproof Front Side
Magnet Material	Ferrite -

SPECIFICATIONS LF UNIT

LF Sensitivity ²	96.0 dB
LF Nominal Power Handling ³	250 W
LF Continuous Power Handling ⁴	500 W
LF Voice Coil Diameter	51 mm (2.0 in)
LF Winding Material	Aluminium
LF Flux Density	1.0 T
Former Material	Glass Fibre
Winding Depth	17.5 mm (0.69 in)
Magnetic Gap Depth	8.0 mm (0.31 in)

SPECIFICATIONS HF UNIT

HF Sensitivity ⁵	104.0 dB
HF Nominal Power Handling ⁶	50 W
HF Continuous Power Handling ⁷	100 W
HF Voice Coil Diameter	44 mm (1.7 in)
HF Winding Material	Aluminium
HF Flux Density	1.8 T
Diaphragm Material	Polyimide
Recommended Crossover ⁸	1.8 kHz
Inductance	0.11 mH

B&C Speakers s.p.a.

Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY - Tel. +39 055 65721 - Fax +39 055 6572312 - mail@bcspeakers.com

PARAMETERS		MOUNTING AND SHIPPING INFO		SERVICE KIT	
Resonance Frequency	69 Hz	Overall Diameter	225 mm (8.8 in)	LF recone kit	RCK008FCX518
Re	4.9 Ω	Bolt Circle Diameter	210 mm (8.3 in)	MF replacement diaphragm	MMD4008
Qes	0.36	Baffle Cutout Diameter	187 mm (7.4 in)		
Qms	6.3	Depth	118 mm (4.64 in)		
Qts	0.34	Flange and Gasket Thickness	10 mm (0.37 in)		
Vas	16.0 dm ³ (0.56 ft ³)	Net Weight	5.0 kg (11.02 lb)		
Sd	220.0 cm ² (34.1 in ²)	Shipping Units	1		
η _e	1.4 %	Shipping Weight	5.6 kg (12.35 lb)		
Xmax	± 6.5 mm	Shipping Box	295x314x175 mm (11.61x12.36x6.89 in)		
Xvar	± 6.0 mm				
Mms	22.0 g				
Bl	11.5 Txm				
Le	0.9 mH				
EBP	191 Hz				

1. Included by -6 dB down points.
2. Applied RMS Voltage is set to 2.83V.
3. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
4. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
5. Applied RMS Voltage is set to 2.83V.
6. 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. Loudspeaker in free air.
7. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
8. 12 dB/oct. or higher slope high-pass filter.