


CLEVER

..... a c o u s t i c s

www.cleveracoustics.co.uk

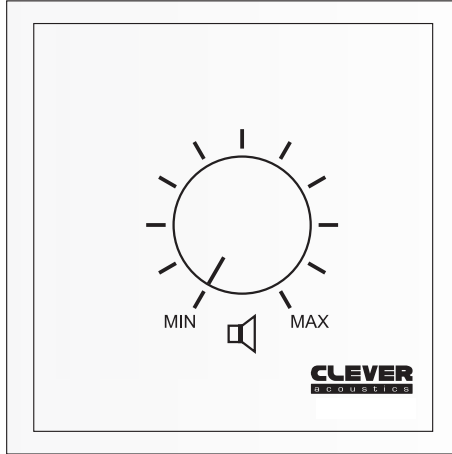

VC 20 100V 20W VOLUME CONTROL
Code: CRVOL01

VC 40 100V 40W VOLUME CONTROL
Code: CRVOL02

VC 60 100V 60W VOLUME CONTROL
Code: CRVOL03

VC 20R 100V 20W VOLUME CONTROL + RELAY
Code: CRVOL04

VC 40R 100V 40W VOLUME CONTROL + RELAY
Code: CRVOL05



VC 60R 100V 60W VOLUME CONTROL + RELAY
Code: CRVOL06

USER MANUAL

.....

WARNING



**FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY
BEFORE YOUR INITIAL START-UP!**

	<p>CAUTION! INPUT VOLTAGE OF 70-100V</p>	
---	--	---

SAFETY INSTRUCTIONS

Every person involved with the installation, operation & maintenance of this equipment should:

- Be competent
- Follow the instructions of this manual

	<p>CAUTION! TAKE CARE USING THIS EQUIPMENT! HIGH VOLTAGE-RISK OF ELECTRIC SHOCK!!</p>	
---	---	---

Before your initial start-up, please make sure that there is no damage caused during transportation. Should there be any, consult your dealer and do not use the equipment.

To maintain the equipment in good working condition and to ensure safe operation, it is necessary for the user to follow the safety instructions and warning notes written in this manual.

Please note that damages caused by user modifications to this equipment are not subject to warranty.

IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorised modification to the equipment.

- Never remove warning or informative labels from the equipment.
- Do not open the equipment and do not modify the equipment.
- Do not switch the equipment on and off in short intervals, as this will reduce the system's life.
- Do not expose to flammable sources or gases.
- Make sure that the loudspeaker-cable is never crimped or damaged. Check the equipment and the loudspeaker-cable periodically.
- If the equipment is dropped or damaged, disconnect the mains power supply immediately. Have a qualified engineer inspect the equipment before operating again.
- If your product fails to function correctly, discontinue use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Prolight dealer for service.
- Repairs, servicing and power connection must only be carried out by a qualified technician. THIS UNIT CONTAINS NO USER SERVICEABLE PARTS.
- WARRANTY; One year from date of purchase.

OPERATING DETERMINATIONS

If this equipment is operated in any other way, than those described in this manual, the product may suffer damage and the warranty becomes void.

Incorrect operation may lead to danger e.g.: short-circuit, burns, electric shocks, lamp failure etc.

Do not endanger your own safety and the safety of others!
Incorrect installation or use can cause serious damage to people and property.

The 100V VC volume controls are designed specifically for use in permanent audio installations with optional 24V relay input (VC 20R, 40R & 60R) for emergency override.

This 100V volume controller warranted from defects for one year from the date of purchase. Should your 100V volume control require service, either within or beyond that warranty period, please contact your Prolight Dealer.


This unit includes a host of features, along with an impressive list of specifications, which are detailed over the next pages. Please take the time to read this document completely prior to installation of this product.

Features:

- 11 volume positions (10 + off)
- Rugged plastic fascia
- DC 24V relay input for volume restoration (VC 20R/40R/60R only)
- Wall screws included (2 x M3 screws)
- Requires back box (not supplied) (CRVOL09)
- Built-in 100V line transformer
- Rotary volume control
- 70V/100V inputs (from mixer amplifier)
- 70V/100V outputs (to speakers)
- Suitable for, schools, industrial and commercial applications where background music, announcements and paging is required

Specifications	VC 20	VC 40	VC 60	VC 20R	VC 40R	VC 60R
Rated Power:	20W	40W	60W	20W	40W	60W
Line input:	70V / 100V	70V / 100V	70V / 100V	70V / 100V	70V / 100V	70V / 100V
Attenuation per step:	3dB	3dB	3dB	3dB	3dB	3dB
Total attenuation:	33dB	33dB	33dB	33dB	33dB	33dB
Attenuation positions	10 + off	10 + off	10 + off	10 + off	10 + off	10 + off
DC 24V relay:	No	No	No	Yes	Yes	Yes
Dimensions (H x W x D):	80 x 80 x 48mm	80 x 80 x 48mm	80 x 80 x 48mm	80 x 80 x 48mm	80 x 80 x 48mm	80 x 80 x 48mm
Order code:	CRVOL01	CRVOL02	CRVOL03	CRVOL04	CRVOL05	CRVOL06

Overview:

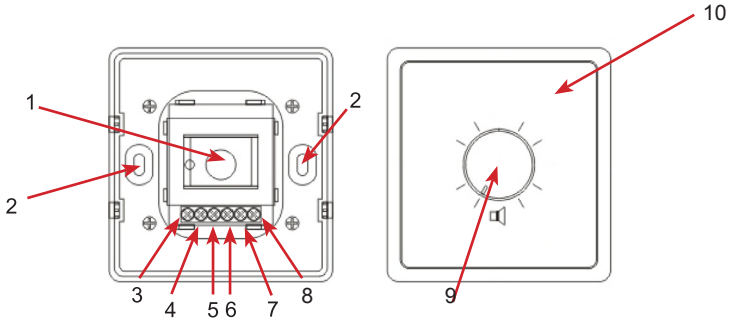

Identification:


- 1. 100V transformer
- 2. Screw mounting holes - Use these to attached the controller to the controller wall back box.
- 3. +ve 100V line input - Use this input to connect the speaker cable from the amplifier.
- 4. Input ground
- 5. Output ground
- 6. +ve 100V line output - Use this output to connect to the speakers from the volume control.
- 7. -ve 24V alarm ground
- 8. + ve 24V alarm input - Use this to connect to the fire alarm. (VC 20R/40R and 60R only).
- 9. Volume control - Use this to increase or decrease the output volume.
- 10. Volume control housing

Wall Installation

The VC Volume Control is designed to be installed using standard 50mm deep pattress boxes.


The durability of the installation depends very much on the material used at the installation area (building material), such as wood, concrete and brick etc.

This is why the fixing material must be chosen to suit the ceiling material. Always ask a specialist for the correct plug/screw combination indicating the maximum load and building material.

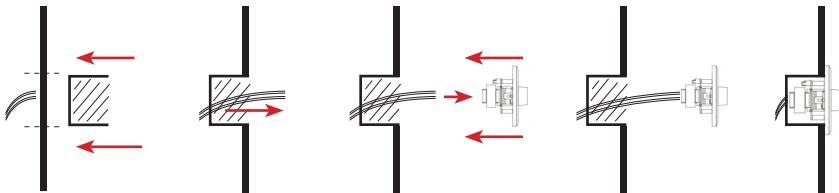

Connections:

EMERGENCY PANEL (VC 20R, 40R 60R ONLY)

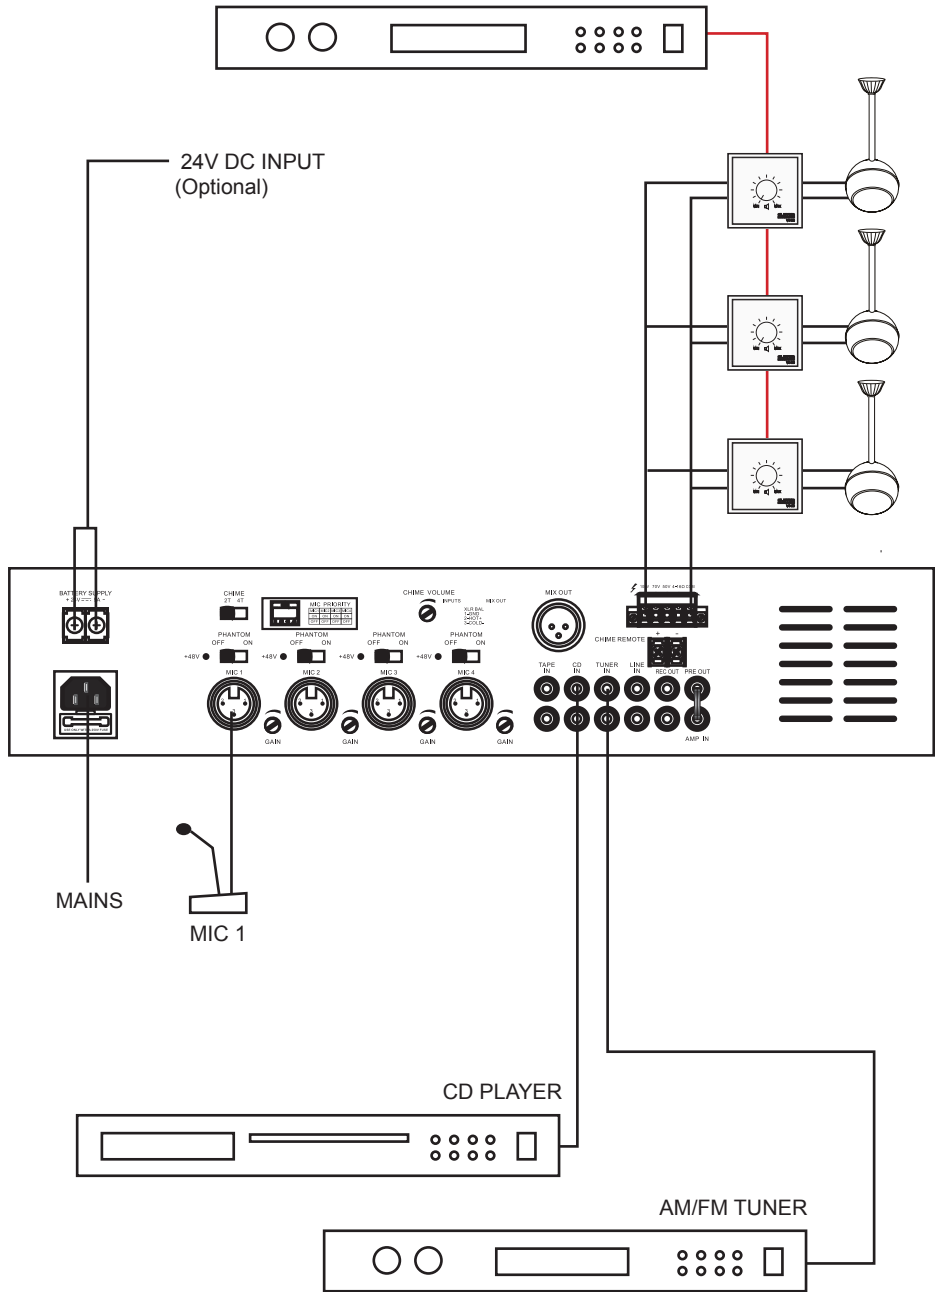



**CAUTION - DANGER TO LIFE
SWITCH OFF AMPLIFIER AND DISCONNECT
THE SPEAKER BEFORE
STARTING MAINTENANCE**



Cleaning and Maintenance

We recommend a frequent cleaning of the product. Please use a soft lint free and moistened cloth. Never use alcohol or solvents.

There are no serviceable parts inside the product except for the fuse. Maintenance and service operations are only to be carried out by authorised dealers.

English



Correct Disposal of this Product (Waste Electrical & Electronic Equipment)

(Applicable in the European Union and other European countries with separate collection systems)

This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

CLEVER

a c o u s t i c s

www.cleveracoustics.co.uk

