

elumen8


CABLE DATASHEET

SPECIFICATION

Description: H05VV-F 3184Y 0.75mm 4 Core Cable

Type: Power cable

Versions: CABL594 - Black, 100m length
Also available by the metre

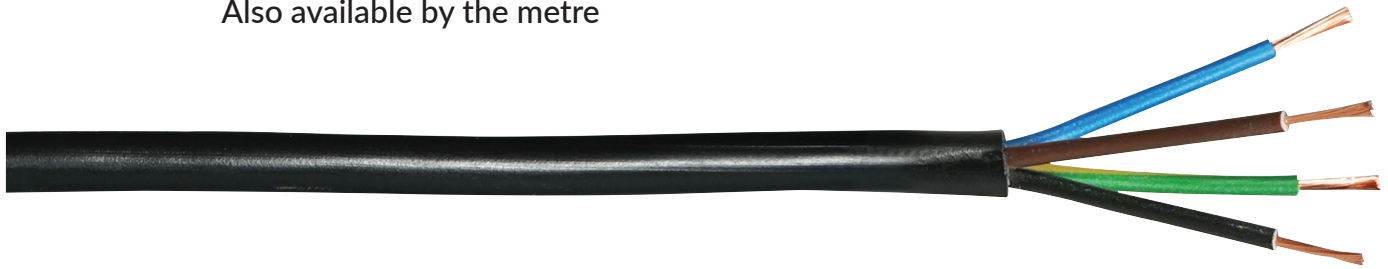

Ordinary duty flexible cords are used where the risk of mechanical damage and mechanical stresses is normal, i.e. when cables are subject to low mechanical stresses in the areas of application, and the risk of mechanical damage is low, as is the case to be expected in the normal use of small to medium size equipment in domestic and commercial as well as in light industrial premises.

- Annealed flexible copper conductor
- PVC insulated
- PVC sheathed
- 300/500V rated
- Manufactured to BS EN 50525-2-11:2011 Clause 4.2, Table B.2.
- Nominal stranding of conductor: 30 x 0.25mm
- Nominal radial thickness of insulation: 0.7mm
- Nominal radial thickness of sheath: 1mm
- Minimum overall diameter: 8.4mm
- Maximum overall diameter: 10.5mm
- Weight per km: 150kg

OPERATION TEMP.

-15°C ~ 70°C