

eLumen8

CABLE DATASHEET


SPECIFICATION

Description: INSTALL LSZH 2 Core 2 x 1.5mm² Speaker Cable SP2X1.5B

Type: Speaker cable

Versions: CABL616 - Black, 100m length
CABL616B - Black, 500m length
CABL617 - White, 100m length
CABL617B - White, 500m length
Also available by the metre

CONSTRUCTION

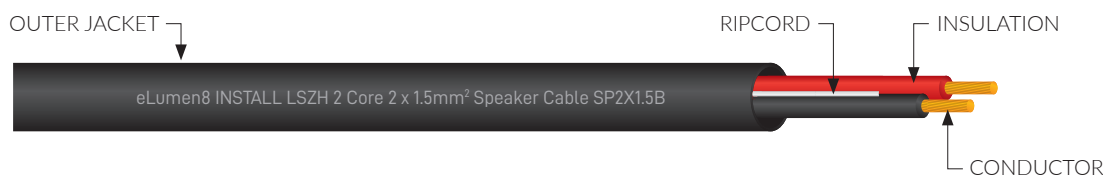

2 core 1.5mm² loudspeaker cable for general purpose low impedance loudspeaker applications in fixed installations. The cable is constructed from two multi-strand, oxygen-free copper cores within a narrow diameter thermoplastic outer jacket. The loudspeaker cable is Low Smoke Zero Halogen to comply with fixed installation requirements.

Conductor: Material - Bare Copper (OFC)
Construction - 65 x 0.16mm
Cross section - 1.5mm² x 2

Insulation: Material - Low Smoke, Halogen-Free Thermoplastic Compounds (LSHF)
Thickness - 0.30mm
Diameter - 2.1mm x 2 core
Colour - 1) Black, 2) Red

Ripcord: Material - Nylon

Outer jacket: Material - Low Smoke, Halogen-Free Thermoplastic Compounds (LSHF)
Thickness - 0.6mm
Diameter - 5.4mm

OPERATION TEMP.

-15°C ~ 60°C

ELECTRICAL CHARACTERISTIC

Conductor resistance: 13.7Ω/km