

Product type (Plug)

Product NO. MP3X

Customer

	(APPROVAL)	(AUDIT)	(COMPILE)
Manufacturer			

	(APPROVAL)	(AUDIT)	(ACCEPT)
(Customer)			

(Product Appearance)



(Product features)

- ✓ 1/4" (Particularly slender 1/4" plugs provide the highest density of packaging)
- ✓ (Strong die-cast housing with novel design)
- ✓ (Chuck jacket provides reliable cable maintenance)
- ✓ (Polishing design provides maximum operational convenience)

(Technical parameters)

1. (Electrical parameters)

(Rated current)	depends on mating connector
(Rated voltage)	< 50V
(Contact resistance)	depends on mating connector
(Dielectric strength)	1000V DC
(Insulation resistance)	> 2G Ω

2. (Mechanical parameters)

(Service life)	> 1000
(Signal line)	18AWG
(Power lin)	1.0mm ²

(Cable)	4.0-7.0mm
-----------	-----------


3. (Material and environmental parameters)

(Shell)	Zinc diecast
(Drivepipe)	Polyacetal + PU
(Contacts)	Brass
(Contact surface)	Ni
(Inner core)	Polyamide
(Emergency relief)	Polyacetal
(Shell Electroplating)	Cr
(Temperature range)	-20°C to +65°C

4. (Standard)

(Electroplating Standard)	IEC 68-2-20
(Standard)	IEC 60603-11 / EIA RS-453

(Product Profile)

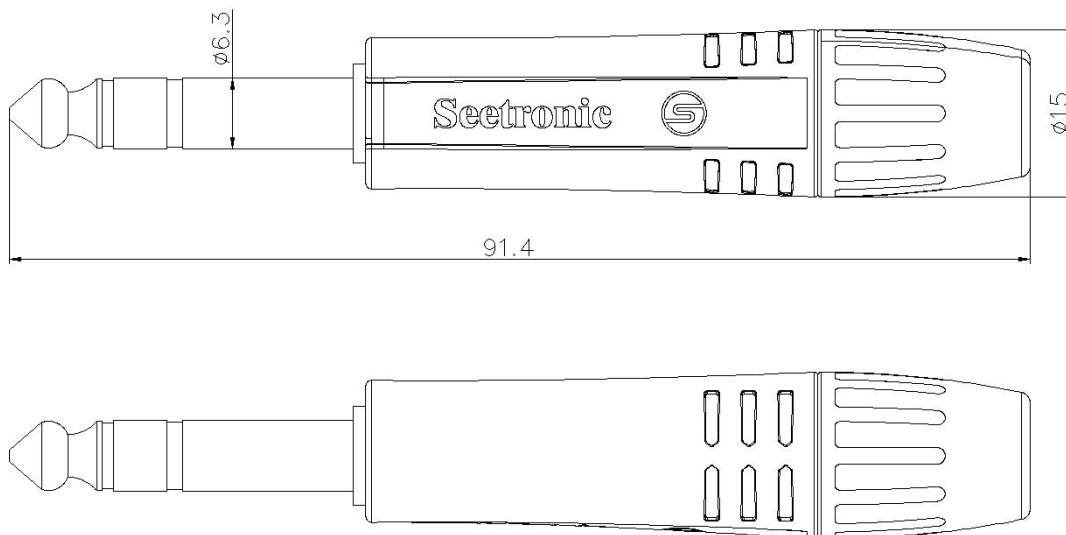

(Installation instructions)

