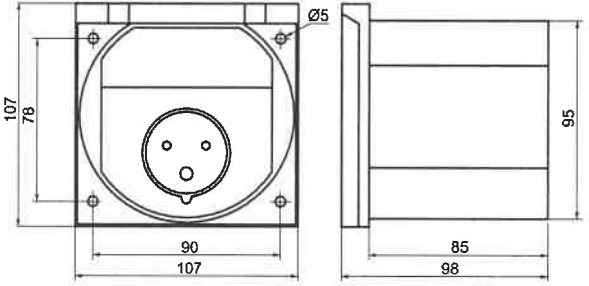


Produkt / product	Caravan Einspeisungsstecker / Caravan Flush Inlet
Artikel / article	0137-6
Material / material	Polyamid PA6 / polyamide PA6
Farbe / color	Weiss / white
Schutzart / protection class	spritzwassergeschützt, IP44 / splash proof, IP44
Chemische Beständigkeit / chemical resistance	öl- sowie benzinbeständig oil and gasoline
Temperaturbeständigkeit / temperature resistance	-25 °C bis 40 °C -25 °C to 40 °C
Technische daten technical details	16A 250V~ 2-polig+E, nach IEC/EN 60309, VDE0623 16A 250VAC 2 poles and earth contact according to IEC/EN 60309, VDE0623
Gewicht / weight	230 Gr. / 230 gr.
Prüfzeichen / certification	
Abmessungen / Dimensions	 <p>The technical drawing shows two views of the Caravan Flush Inlet. The front view (left) shows a square-shaped device with a circular opening in the center. The overall width is 107 mm and the height is 107 mm. The central opening has a diameter of 90 mm. The distance from the top edge to the center of the opening is 78 mm. The distance from the bottom edge to the center of the opening is 90 mm. The distance from the left edge to the center of the opening is 107 mm. The distance from the right edge to the center of the opening is 90 mm. The side view (right) shows the profile of the device. The overall height is 95 mm. The width of the device is 85 mm. The distance from the bottom edge to the top edge of the main body is 98 mm. A dimension of 25 mm is indicated for the top edge of the device.</p>