



#### Passive Sound Reinforcement Subwoofer

#### **APPLICATIONS**

- Bars, Pubs, Restaurants, Retail shops, Clubs
- Entertainment venues, Fitness centres
- Conference rooms, Theatres
- · Houses of worship, Exhibition centres


### **KEY FEATURES**

- Passive subwoofer with bass-reflex enclosure
- 0.70" birch plywood cabinet
- 2 x 15" custom made high excursion woofers
- 2000W RMS recommended amplifier
- Max. SPL 142dB peak
- Four FBT design aluminum handles
- 2 x Speakon NL-4 connectors
- Available in black or white extra texture paint
- · Completely manufactured in Italy



#### PRODUCT DESCRIPTION

The FBT ARCHON 215S is a 2 x 15" passive sound reinforcement subwoofer. The FBT ARCHON 215S meet the following performance criteria: frequency response of 35Hz to 500Hz, frequency sensitivity of 101dB, maximum SPL of 142dB peak, 2000W RMS recommended amplifier. The FBT ARCHON 215S features 0,70" birch plywood construction covered in a scratch resistant black or white paint with four FBT design aluminum handles handles. The rear facing input panel provides 2 x Neutrik NL4 speakon female connectors.

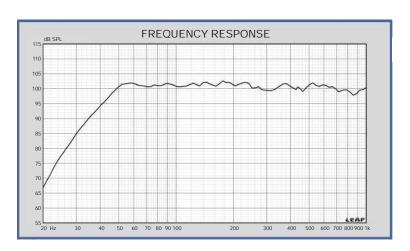

#### **ELECTRONIC SPECIFICATIONS**

System Type	1 way
Recommended Amplifier	2000W RMS
System Long Term Power	1000W
System Short Term Power (IEC 26	8-5) 4000W
Nominal Impedance	4 Ohm
Frequency Response	35Hz - 500Hz (@-6dB)
Sensitivity	101dB (@1W, 1m)
Max SPL (cont/peak) (bi-amp)*	139dB / 142dB half space
Dispersion	omnidirectional
Crossover Frequency	external active
Recommended HP Filter	28Hz - 24dB oct.

#### PHYSICAL SPECIFICATIONS


Low Frequency	/ Woofer	2 x 15" / 3" coil
Input Connectors		2 x Speakon NL4
Net Dimensions (WxHxD) inch		35,43 x 19,09 x 25,19
Shipping Dimensions (WxHxD) inch		39,4 x 20,8 x 31,5
Net Weight		110,2 lbs
Shipping Weigh	nt	132,3 lbs
Enclosure Material		0.70" baltic plywood
Grille	Steel with powder coat	black or white paint finish

<sup>\*</sup> CONT. SPL: free space, based on recommended amp rating and LF transducer average sensitivity data, 125mS time average PEAK SPL: free space, based on short term applicable power rating and system peak sensitivity, 10mS time average



Passive Sound Reinforcement Subwoofer

## **DIMENSIONAL DRAWINGS**

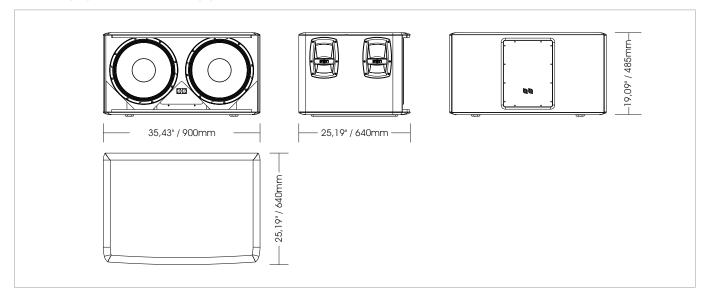

# **CONNECTION PANEL**

