



SHADOW 112CT

APPLICATIONS

- Convention centers
- Athletic fields
- Stadiums
- Theme parks
- Swimming pools
- Cruise ships
- Malls
- Ballrooms
- Outdoor background music

KEY FEATURES

- 2-way multipurpose 12" coax
- Sturdy molded polyethylene curved enclosure
- 12" coaxial woofer with 2.5" coil
- 1" HF driver with 1.7" coil
- Line transformer
- 4 wires cable to select the power tapping
- IP55 weather resistant
- Standard grey finish
- Completely manufactured in Italy

ALL WEATHER LOUDSPEAKERS



Designed, Engineered
and Manufactured in ITALY

PRODUCT DESCRIPTION

The SHADOW 112CT is a weatherproof coaxial two way loudspeaker system offering substantial power and efficiency for a variety of professional indoor or outdoor applications. The low frequency transducer is a 12" woofer with a 2.5" voice coil. The high frequency section is a 1" driver with 1.7" voice coil on conical 90° horn. The SHADOW 112CT features a line transformer for 70-100V applications. The cabinet is a single piece rotational moulded in polyethylene, fully UV protected. The cabinet is equipped with a stainless steel U-bracket. The grille is in custom perforated stainless steel with 3 layers of protection. The SHADOW 112CT meets the requirements of IP55 code (International Protection Rating).

ELECTRONIC SPECIFICATIONS

System Type	2 Way
Recommended Amplifier	600W RMS
System Long Term Power	300W
System Short Term Power (IEC 268-5)	1200W
Transformer (optional)	100V / 200W/100W
Nominal Impedance	8 Ohm
Frequency Response	70Hz - 20kHz (@-6dB)
Sensitivity	98dB (@1W, 1m)
Max SPL (cont/peak) (bi-amp)*	124dB / 128dB
Dispersion	90° conical
Crossover Frequency	1.6kHz
Recommended HP Filter	50Hz - 24dB oct.

PHYSICAL SPECIFICATIONS

Low Frequency Woofer	12" / 2.5" coil
High Frequency Driver	1" / 1.7" coil
Input Connectors	4 wire cable
Net Dimensions (WxHxD) inch	16.92 x 16.92 x 15.74
Shipping Dimensions (WxHxD) inch	20.86 x 20.86 x 19.68
Net Weight	33 lbs
Shipping Weight	37 lbs
Enclosure Material	Polyethylene rotomoulded
Grille	Custom perforated stainless steel

* CONT. SPL: free space, based on recommended amp rating and LF transducer average sensitivity data, 125mS time average
PEAK SPL: free space, based on short term applicable power rating and system peak sensitivity, 10mS time average





SHADOW



112CT

DIAGRAMS


Horizontal polar diagram

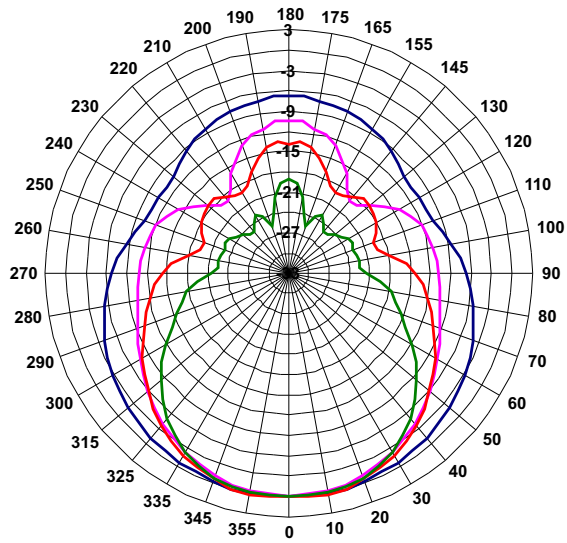

Horizontal polar diagram

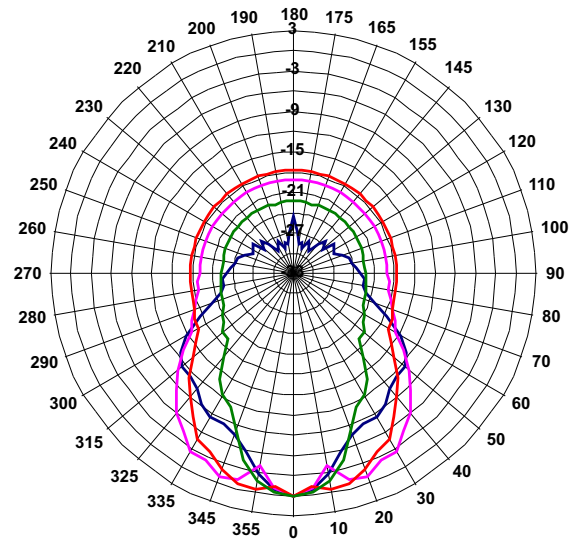

Horizontal coverage

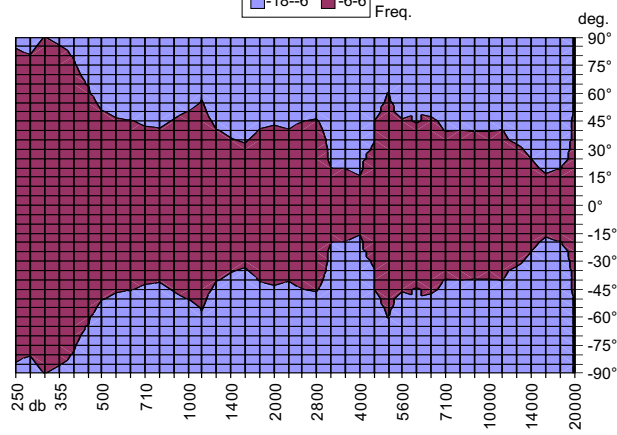





SHADOW



112CT

DIAGRAMS



Vertical polar diagram

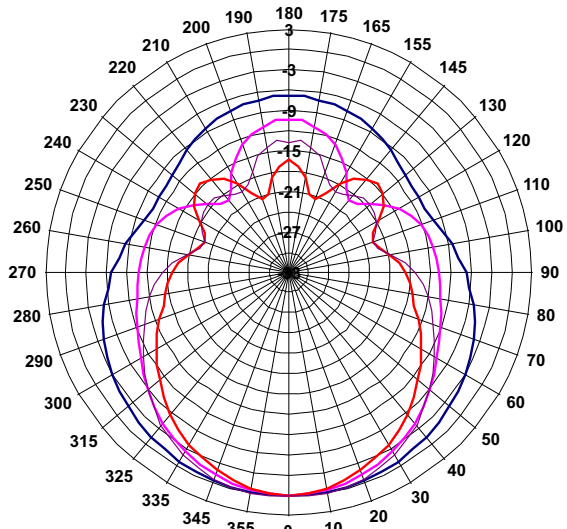



Vertical polar diagram

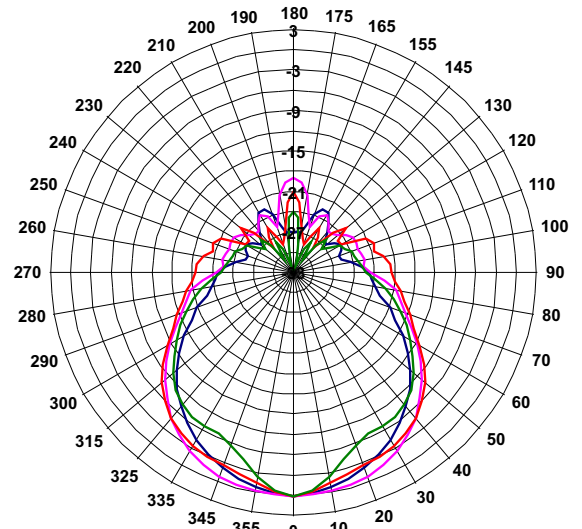


Vertical polar diagram

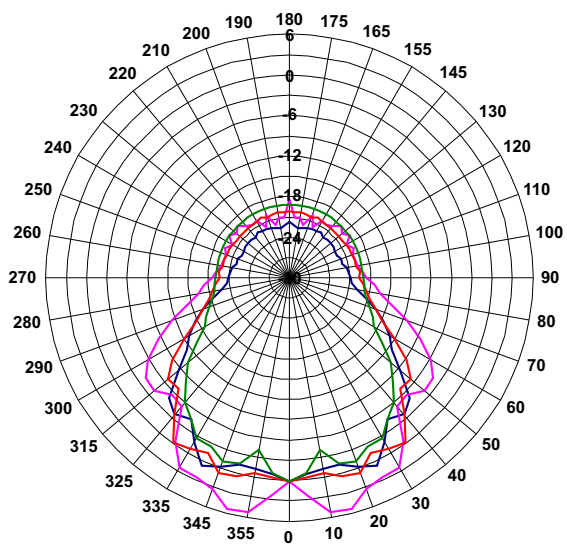

Vertical polar diagram

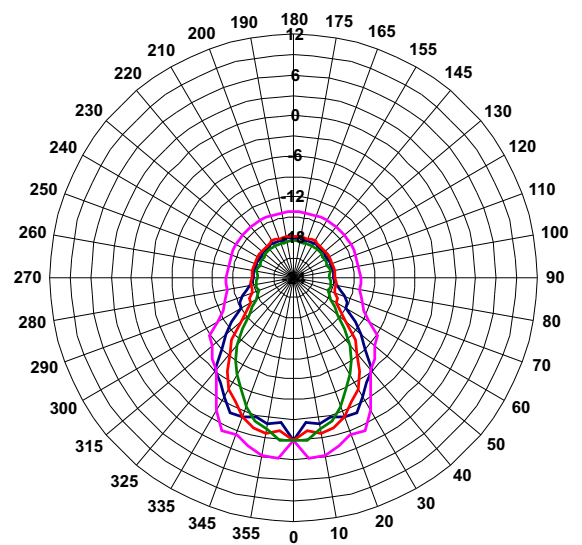


Vertical coverage

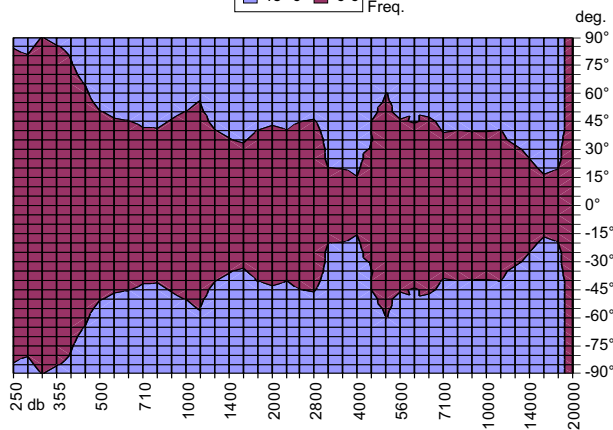





SHADOW 112CT

DIMENSIONAL DRAWINGS

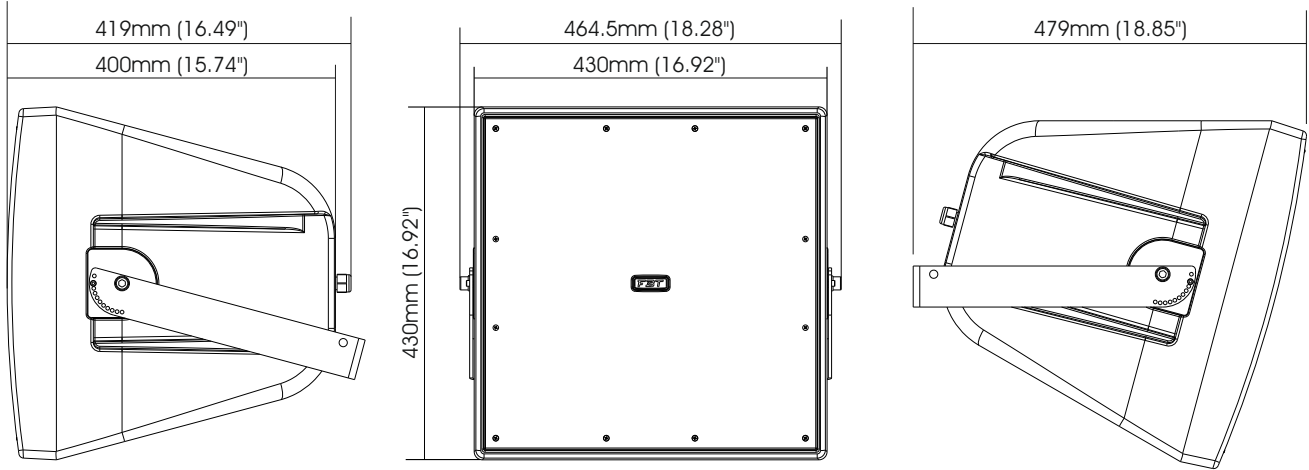

TECHNICAL SPECIFICATIONS LABEL

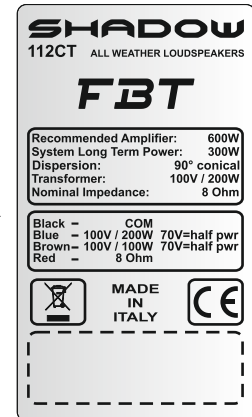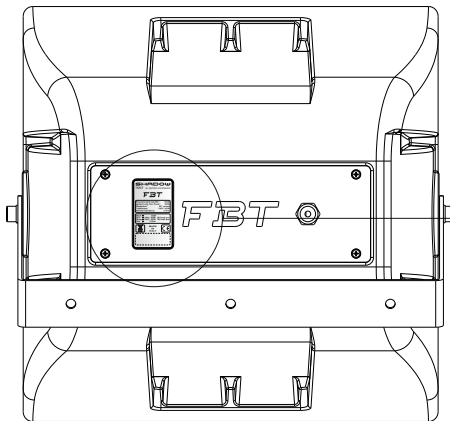

SUPPLIED ACCESSORY

