


TA-58 5 GHz Digital Plug-on Transmitter

Features

- Operates in the ISM band to avoid wireless interference signals.
- The fiber-reinforced plastic housing that isolates RF spurious and noise interference, is equipped with a built-in high efficiency transmitting antenna and a green backlit LCD, which displays operation parameters.
- Features a flat and wide frequency response, ultra-low THD and noise floor, and fast transient response. It solves the problems of tangling microphone cables and defects of analog transmission. Thus, it is an ideal gear to reproduce the natural sound of any premium wired microphone.
- A balanced XLR input jack for any condenser microphone to plug on.
- Supplies 48 V phantom power at 10 mA for condenser microphones.
- A high-capacity lithium-ion battery enables up to 8 hours of use per charge. Recharge via a USB Type-C socket or simply replace the battery.

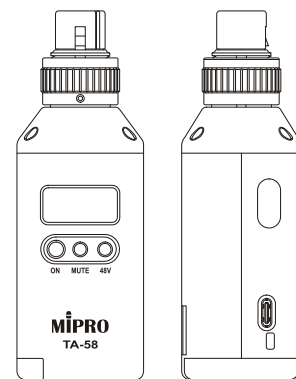

Specifications

Frequency Band	ISM 5.8 GHz
Bandwidth	125 MHz
RF Power Output	20 mW (country dependent)
Gain Setting	0 dB
AF Input Level	2 V
Phantom Power	48 V @ 10 mA max.
Battery Type	One 18500 Li-ion battery
Battery Charging	USB Type-C
Dimensions	40 × 117 × 38 mm (W × H × D)
Weight	Approx. 120 g