

Zenith 110



Professional
Loudspeaker

Key Features:

- 10"/65mm Transducer
- 1.75" Voice Coil, 1" Exit Titanium Compression Driver
- 80°×60° Coverage Pattern
- Smooth Response With High Power Handling Capacity of 250W RMS
- 12 Integral Suspension Points
- Complete Mounting Solutions



General Description and Applications:

The Zenith Active and Passive Series from 10", 12" to 15" offer truly professional sound to musicians and DJs working small to medium venues live performance.

The full range 2-way systems function either as mains PA or as monitors by adjustable 45 or 60 degree horn flare and can be mounted on pole stands. The portable, full range loudspeakers are optimized for use with the **W_{audio}** subwoofer, which also serves as a pole mount base.

Additionally, any **W_{audio}** subwoofer will complement the Zenith Series. The full range models include threaded mounting points for installation applications.

Technical Specification:

Freq. Range(-10dB):	65Hz~20kHz
Freq. Response(-3dB):	70Hz~20kHz
Rec. Hipass Frequency:	50Hz
Axial Sensitivity:	96dB(1W/1m)
Max Calculated SPL:	126dB
Horizontal Coverage:	80°
Vertical Coverage:	60°
Rated System Power:	250W Continuous 1000W Peak
LF Transducer:	10"/65mm
HF Transducer:	1"/45mm
Crossover Frequency:	2.1kHz
Nominal Impedance:	8 Ohms
Connector:	2×NL4 Speakon
Dim (H×W×D):	536mm×315mm×315mm
Net Weight:	17Kg
Shipping Weight:	19Kg




Zenith 110




Professional
Loudspeaker

Frequency Response

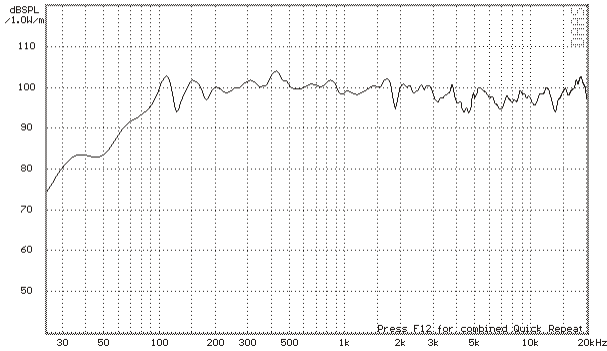

Block Diagram

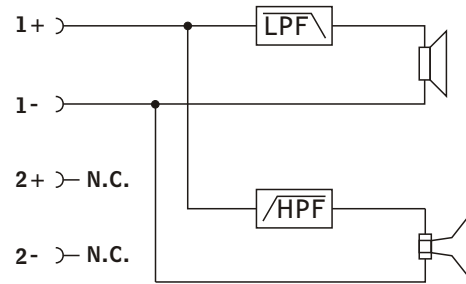

Dimension Drawings

