


Smart Socket® for 15A & 13A

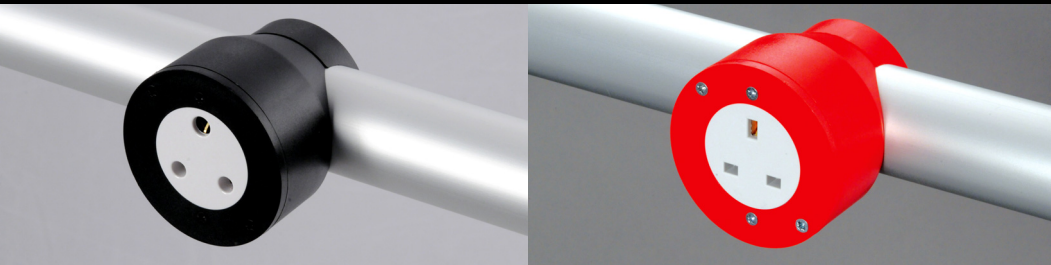

The Robolights® Smart Socket® is a versatile socket outlet designed for use on internally wired lighting bars. Manufactured from resilient, self coloured injection moulded ABS the Smart Socket® is lightweight hardwearing and simple to install.

This version of the Smart Socket® is designed to accept the 15A round pin BS546 socket outlet commonly used for stage lighting equipment; it will also accept a 13A BS1363 rectangular pin (UK standard) socket outlet.



Installation is straight forward needing only one 16mm hole to be drilled into one wall of the lighting bar and the Smart Socket® is supplied complete with all necessary screws including those for the (separately supplied) 15A or 13A socket insert. To install the Smart Socket® simply press fit its specially designed bush into the drilled hole to locate it and then tighten the clamp screws. Full fitting instructions can be downloaded from the Robolights® Website.

Stock colours are black, silver, white, red, blue, green and yellow. Other custom colours are available by special order, please contact us for more details.

**For technical help and advice:
Call +44 (0) 1392 823040**

www.robolights.com

Robolights:
5 G.D. Units, Cofton Road
Marsh Barton, Exeter, Devon
EX2 8QW

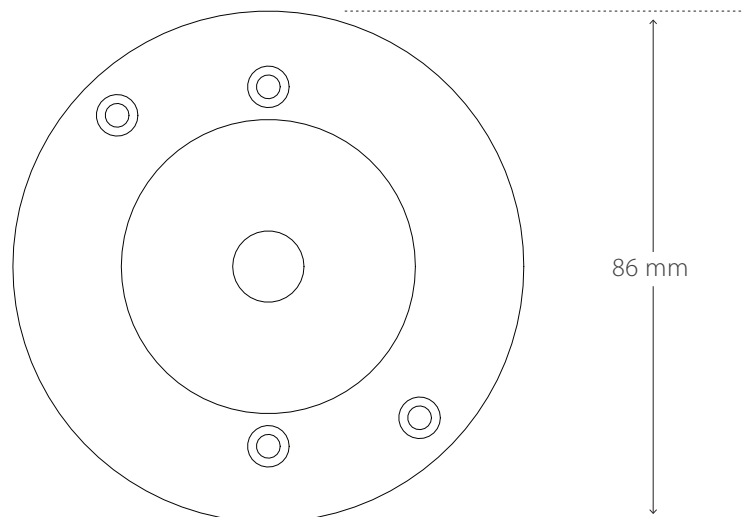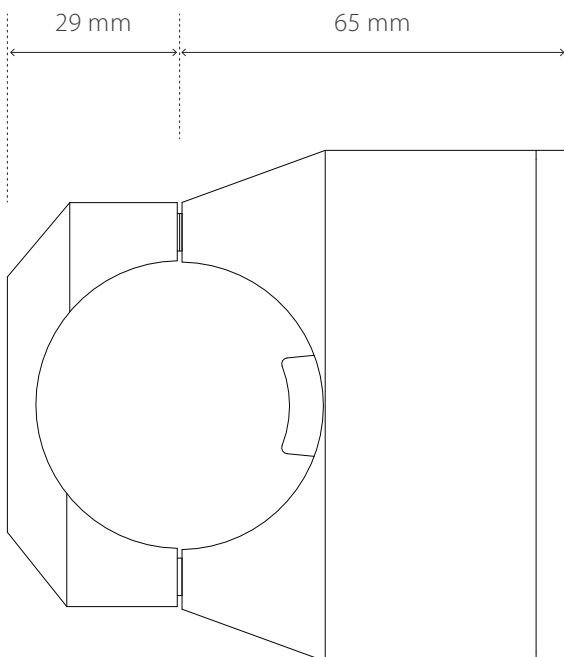




Smart Socket® for 15A & 13A

Technical Information:

Smart Socket® material	Injection moulded, self coloured, medium impact ABS.
Weight	108g (184g including 15A socket) 108g (166g including 13A socket)
Tube specification	Smart Sockets® are designed for use only with 'standard' 48 mm aluminium scaffold tube with 48.4mm (1 29/32") out side diameter x 7 SWG (4.76 mm) wall thickness. <i>N.B. Smart Sockets will not fit 50 mm tube</i>
Fixing screws	All included screws are Pozi-Drive TM type either bright zinc plated or chemi-black to match Smart Socket colour.
Part numbers	Smart Socket® for 15A / 13A - Black - SSS/15A/B Smart Socket® for 15A / 13A - Silver - SSS/15A/S

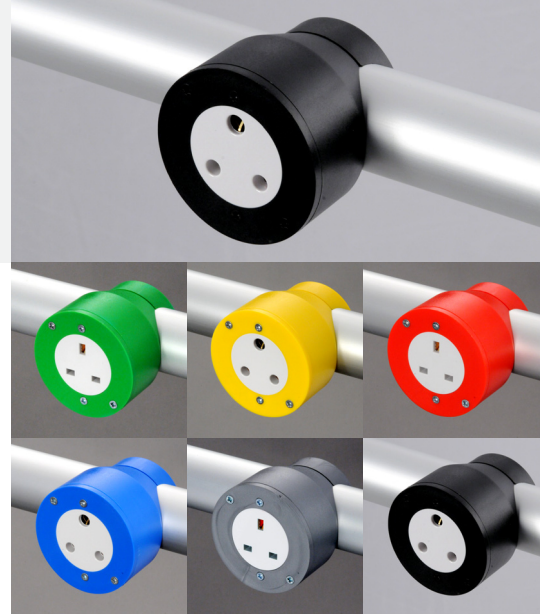

For technical help and advice:
Call +44 (0) 1392 823040

www.robolights.com

Robolights:
5 G.D. Units, Cofton Road
Marsh Barton, Exeter, Devon
EX2 8QW

Important:

The Robolights® Smart Socket® should only be installed by a suitably qualified person. The installer must ensure that the final assembly conforms to and is in accordance with all regional electrical regulations prevailing at any time.

Certain features and functions of Robolights products are protected by Patent Law. Smart Socket, Smart Clamp and the Robolights text and logo device are registered trademarks and remain the sole property of Robolights Limited. As such they may not be reproduced in any form without the prior express written consent of Robolights Limited.