
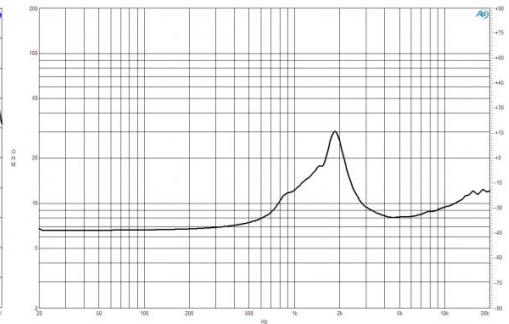


- 40 W continuous program power capacity
- 1" horn throat diameter
- 36 mm (1.4 in) aluminium voice coil
- Mylar diaphragm
- 1500 - 18000 Hz response
- 106 dB sensitivity

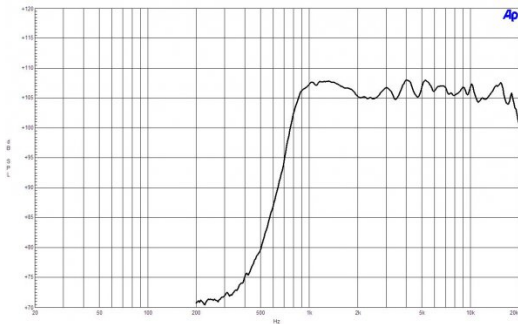

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	8 Ω
Nominal Power Handling	20 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	40 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	106 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	2 - 18 kHz
Recommended Crossover	2 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	36 mm (1.4 in)
Winding Material	Aluminium
Inductance	0.14 mH
Diaphragm Material	Mylar
Flux Density	1.9 T
Max Frequency Range	18 kHz
Min Frequency Range	2 kHz

MOUNTING AND SHIPPING INFO

Three M5 holes 120° on 57 mm (2.2 in) diameter Two M5 holes 180° on 57 mm (2.2 in) diameter

Overall Diameter	71 mm (2.8 in)
Depth	34 mm (1.34 in)
Net Weight	0.45 kg (0.98 lb)
Shipping Units	1 pcs
Shipping Weight	0.48 kg (1.05 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)