

eLumen8

CABLE DATASHEET


SPECIFICATION

Description: TOUR 4 Core 4 x 4.0mm² Speaker Cable SP4X4.0B

Type: Speaker cable

Versions: CABL612 - Black, 100m length
Also available by the metre

CONSTRUCTION

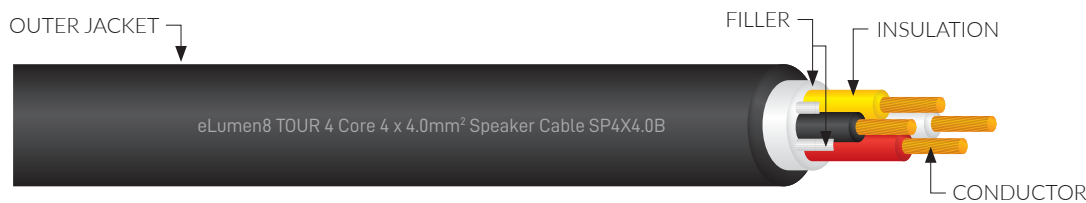

Touring quality, 4 core loudspeaker cable for high power rental applications. The cable is constructed from four multi-strand, oxygen-free cores within a super flexible PVC outer jacket. The loudspeaker cable can be coiled and re-coiled multiple times whilst retaining its flexibility and shape. Each internal core is made up from seven cores, each one featuring 73 strands of oxygen-free high grade copper.

Conductor: Material - Bare Copper (OFC)
Construction - 7 x 73 x 0.10mm
Cross section - 4.0mm² x 4

Insulation: Material - Polyvinylchloride (PVC)
Thickness - 0.5mm
Diameter - 4.0mm x 4 core
Colour - 1) White, 2) Red, 3) Black, 4) Yellow

Filler: Material - Cotton + Paper

Outer jacket: Material - Polyvinylchloride (PVC)
Thickness - 1.2mm
Diameter - 13.0mm

OPERATION TEMP.

-15°C ~ 60°C

ELECTRICAL CHARACTERISTIC

Conductor resistance: 4.8Ω/km