

# eLumen8

## CABLE DATASHEET


### SPECIFICATION

**Description:** TOUR Screened 2 Pair DMX Cable DMX2PRB

**Type:** DMX cable

**Versions:** CABL628 - Black, 100m length  
CABL628B - Black, 500m length  
Also available by the metre

### CONSTRUCTION

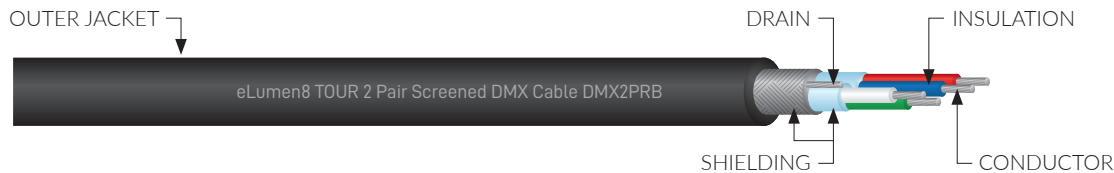

Professional quality, 2 pair screened DMX cable suitable for general stage lighting control applications. The cable is constructed from a two pairs of tinned, oxygen-free copper cores, each protected by both aluminium polyester foil plus an overall tinned oxygen-free copper woven braid complete with drain wire. The cable is finished with a flexible outer PVC jacket.

**Conductor:** Material - Tinned Copper (OFC)  
Construction - 20 x 0.12mm  
Cross section - 0.23mm<sup>2</sup> (24AWG) x 4

**Insulation:** Material - Polyethylene Foam (FPE)  
Thickness - 0.45mm  
Diameter - 1.6mm x 2 pair  
Colour - 1) Red/Blue, 2) White/Green

**Drain Wire:** Material - Tinned Copper (OFC)  
Construction - 7 x 0.20mm  
Cross section - 0.22mm<sup>2</sup> (24AWG)

**Shielding:** Material - Aluminum Foil + Tinned Copper (OFC)  
Construction - Aluminium Foil x 2 + 144 x 0.10mm Braiding  
Coverage - 100% Aluminium Foil + 90% OFC Braiding

**Outer jacket:** Material - Polyvinylchloride (PVC)  
Thickness - 1.5mm  
Diameter - 7.8mm

### OPERATION TEMP.

-15°C ~ 60°C

### ELECTRICAL CHARACTERISTIC

**Nominal impedance:** 110Ω

**Conductor resistance:** 82.0Ω/km