





## SPECIFICATIONS

ELEMENT	Externally-polarized (DC bias) Large Diaphragm condenser
POLAR PATTERN	Cardioid, Omnidirectional, figure-8
FREQUENCY RESPONSE	20 ~ 20,000Hz
LOW FREQUENCY ROLL-OFF	80Hz, 12dB/octave
ATTENUATION SWITCH	10dB pad
OPEN CIRCUIT SENSITIVITY	-38±3 dB* (12.6mV) 0dB=1V / Pa,1kHz
IMPEDANCE	Rated impedance 200Ω
MAXIMUM INPUT SOUND LEVEL	132 dB SPL, 1kHz at 1% T.H.D
SIGNAL-TO-NOISE RATIO	78dB
OUTPUT CONNECTOR	XLR-M type
PHANTOM POWER REQUIREMENTS	36-52VDC
CURRENT CONSUMPTION	≤ 1mA
WEIGHT	480 grams (16.9oz)
DIMENSIONS	56mm Dia × 184mm

### Cardioid

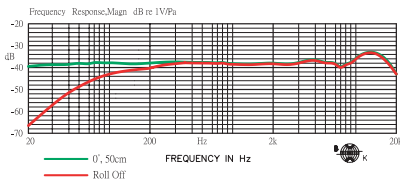

### Omnidirection

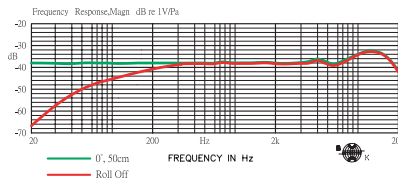

### Figure-8

