

NX-Series Microphone



NX-7S/8S-02

NX-7S Professional Multipurpose Microphone



The outstanding pick-up pattern and sound quality makes the NX-7S ideal for vocal, drums, guitar amplifiers and other instruments.

The top-flat grille allows mic. cartridge closer to a sound source to maximize low frequency proximity effective. The magnetic reed switch with locking permits silent operation and prevents miss-function.

Specification:

Type: Moving Coil

Frequency Response: 50 ~ 16,500Hz

Polar Pattern: Cardioid

Output Level(at 1,000Hz): -72dB

Impedance: 600 Ω \pm 30 %

Phasing :Positive pressure on diaphragm produces Positive voltage on pin 2 with respect to Pin 3.

Connector: 3P XLR connector .

Case: Metallic enamel-painted die cast metal with Hardened, matte-finished steel grille.

Net Weight: 235 grams(8.3 oz)

Touch Noise: Super low

Switch Type: Magnetic Reed Switch

NX-8S Vocal Performance Microphone



The NX-8S provides extended frequency response and dynamic range for more clear and smoother sound. The shock mount keeps handling noise to an extreme low level. Reinforced cartridge and hardened grille make the NX-8S one of the most rugged mics in the professional microphone industry.

The magnetic reed switch with locking permits Silent operation and prevents miss-function.

Specification:

Type: Moving Coil Dynamic

Frequency Response: 50 ~ 16,500Hz

Polar Pattern: Cardioid

Output Level(at 1,000Hz):-72dB

Impedance: 600 Ω \pm 30 %

Phasing: Positive pressure on diaphragm produces Positive voltage on pin 2 with respect to pin 3.

Connector: 3P XLR connector.


Case: Metallic enamel-painted die cast metal with Hardened, matte-finished steel grille.

Net Weight: 245 grams(8.6 oz)


Touch Noise: Super low

Switch Type: Magnetic Reed Switch

NX-7S

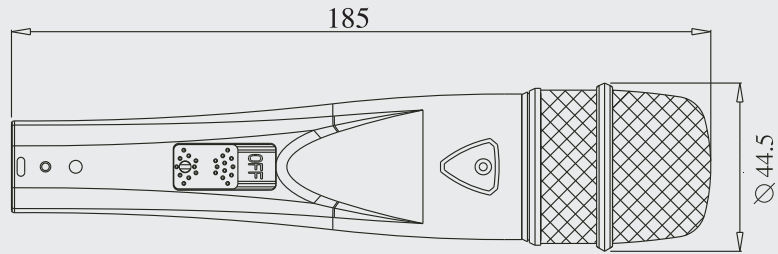

NX-8S

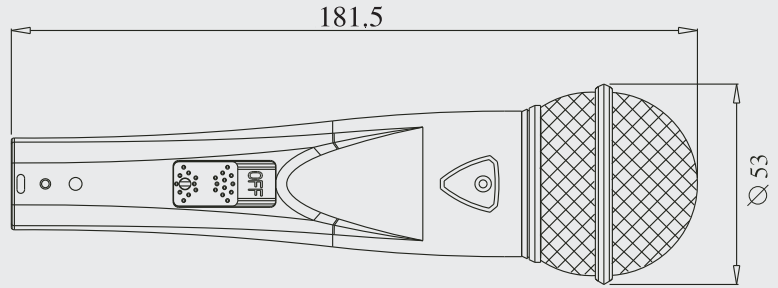

NX-7S

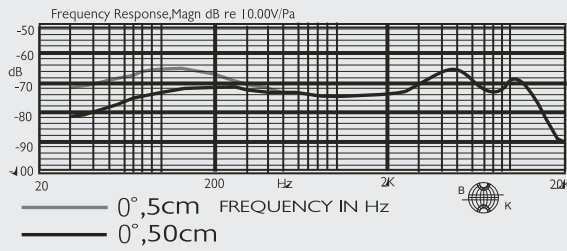


Figure 1

NX-8S

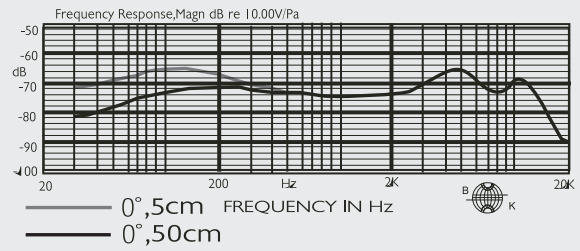


Figure 1

NX-7S

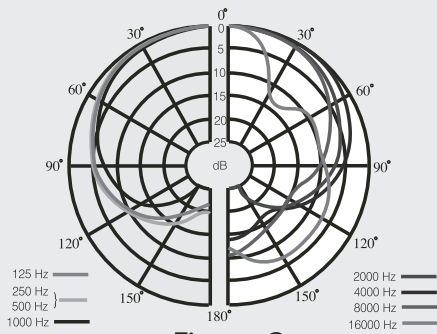


Figure 2

NX-8S

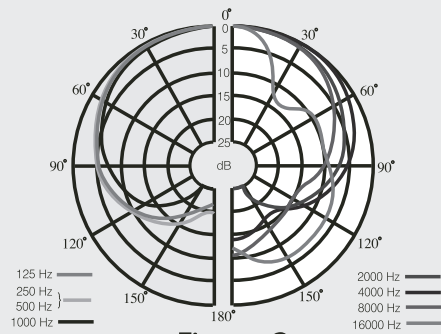


Figure 2