
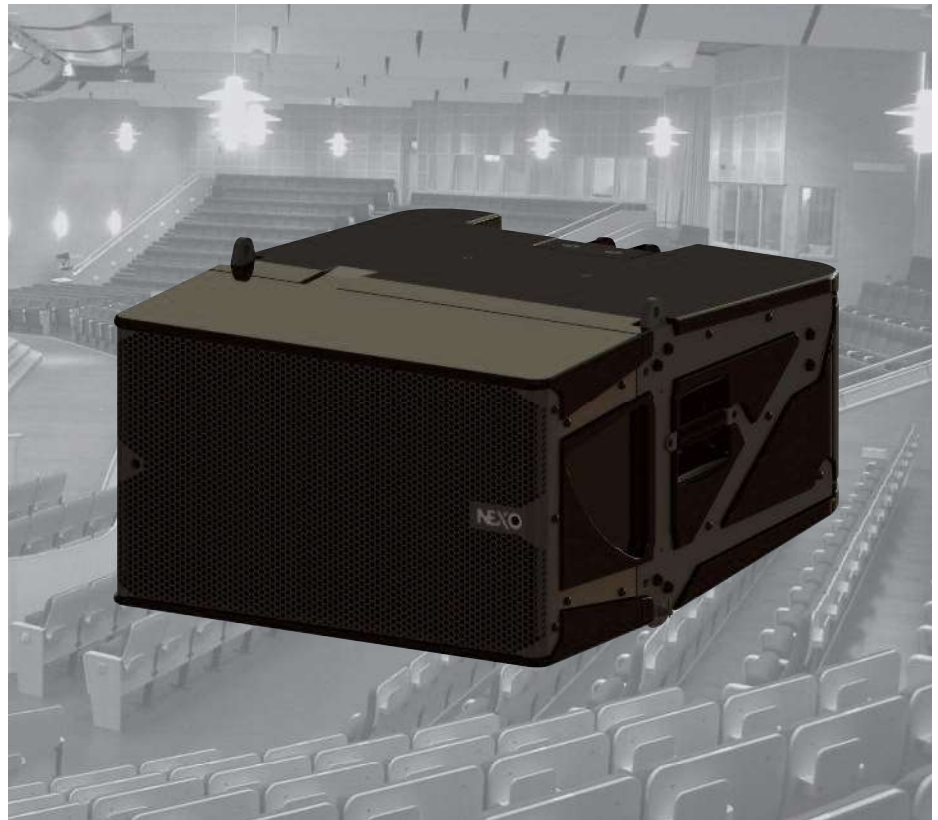
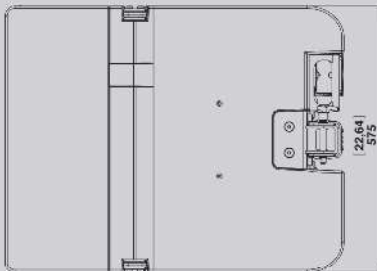



STMi B112 Bass Module

NEXO

STMi




STMi extends the NEXO concept of Scale Through Modularity to provide designers of fixed-installation sound systems with a series of three modules (STMi M46 main, B112 bass and S118 sub) from which systems of any scale can be easily configured.

The STMi B112 is an injection-moulded bass cabinet featuring a Neodymium high excursion 3000W 12" bass driver with 4" voice coil. It has the same format – dimensions, weight, gravity centre – as the STMi M46 main cabinet. The hybrid horn-loaded design maximizes the efficiency of the driver, delivering 6dB more than a standard front-loaded driver in this frequency range.

Configuration possibilities include Main cabinets only, Main + Bass, Main + Sub, Main + Bass + Sub. The wide operating frequency range of the STMi M46 main cabinets means that many speech or light music events can be run effectively with M46 alone, thereby removing the need for any extra cabinets. If programme material calls for low frequency extension, the 25-120Hz range of the STMi S118 sub and the 55-200Hz range of the STMi B112 bass offer the user complete freedom when configuring the system to achieve the desired frequency response or power.



Specific rigid fixed-installation rigging system with no moving parts.

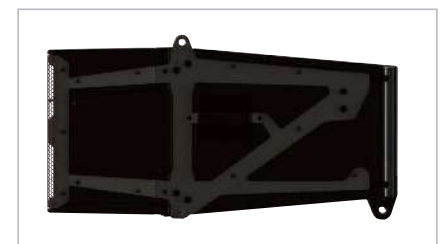

Key Features

- 1 x 3000W +/- 3cm excursion 12 inch LF Driver
- 141dB peak SPL
- Frequency response: 63Hz-200Hz
- H350mm/W575mm/D715mm
- 58Kg/128lb

System Applications

- Fixed installations in:
 - Theatres
 - Auditoria
 - Houses of Worship
 - Public Buildings
 - Clubs
 - Live music venues

NEXO
www.nexo.fr

STMi B112 Bass Module

NEXO

STMi



STMi B112 with NXAMP 4x4

Frequency Response [a]	63Hz – 200Hz \pm 3dB
Usable Range @-6dB [a]	55Hz – 250Hz
Sensitivity 1W @ 1m [b]	107dB SPL Nominal
Nominal Peak SPL @ 1m [b]	141dB Peak
Nominal Impedance	16 Ω (12 Ω min)
Amplified Controller	NXAMP4x4 - 3xSTM B112 in parallel on 2 NXAMP4x4 bridged channels - 8000W/4 Ω

PRODUCT FEATURES

Components :	LF: 1 x 12" (30cm) 3000W high excursion Neodymium 16 Ohms driver.
Height x Width x Depth	350 x 575 x 715 mm – 13.78" x 22.64" x 28.15"
Weight : Net	58kg – 128lbs
Connectors	2 x NLT4-MDV Speakon 4 poles (in/out)
Construction	PU Composite Low Density – Polyurethane water based black coating
Fittings:	Handles 2 handles (1 per side)
	Front Perforated Dark Grey Metal Grille
	Rigging Integral 3 points flying

SYSTEM OPERATION

Electronic Controller	The NEXO NXAMP4x4 presets are precisely matched to the STM Series cabinets and include sophisticated protection algorithms. Using STM Series cabinets without a properly connected NEXO NXAMP4x4 will result in poor sound quality and can damage components.
Sub-Bass	STM S118 extends system low frequency response down to 25Hz
Speaker Cabling	1-/1+ : SUB - 2-/2+ : LF

As part of a policy of continual improvement, NEXO reserves the right to change specifications without notice.

[a] Response curves & data : Half-Space Far Field for the STM S118 & B112 + NXAMP4x4.

[b] Sensitivity & Peak SPL data : these will depend on spectral distribution and crest factor of program material. Measured with band limited Pink Noise. Data are for speaker + amplified controller. Peak SPL is at clipping of NXAMP4x4.

[c] Directivity curves & data : obtained by computer treatment on off axis response curves.

E&OE January 2013.

LIMITED WARRANTY

NEXO loudspeakers and electronics are covered against defects in workmanship or materials for a period of two (2) years from the original date of purchase. At the option of NEXO the defective item will be repaired/replaced with no charge for materials/labour. The item is to be adequately packaged and dispatched, pre-paid, to a NEXO authorised distributor/service centre. Unauthorised repair shall void the warranty. The NEXO warranty does not cover cosmetics or finish and does not apply to any items which in NEXO's opinion have failed due to used abuse, accidents, modifications or any type of misuse. All images and text herein are the property of NEXO SA, and deemed accurate, although specifications are subject to change without notice.

NEXO S.A.
Parc d'Activité
du Pré de la Dame Jeanne
B.P. 5
60128 PLAILLY
Tel: +33 (0) 3 44 99 00 70
Fax: +33 (0) 3 44 99 00 30
e-mail: info@nexo.fr

NEXO LatAm
Tel: +54 114 432 1911
Fax: +54 114 431 1007
e-mail: info@nexo.fr

NEXO Asia
GPO Box 806
Hong Kong
SAR China
Tel: +852 9096 3472
Fax: +852 2104 3214
e-mail: info@nexo.fr

NEXO
www.nexo.fr